SS/SSC 1031 Multipole Plugs

All dimensions see note **1)**

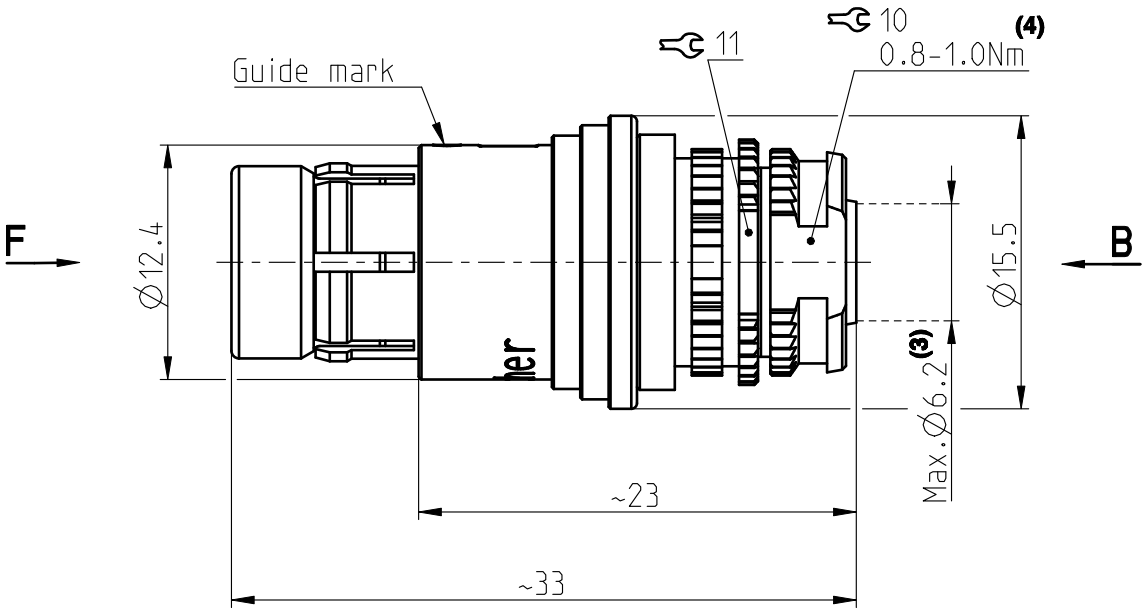

Contact polarity A



Contact polarity Z



CONTACT CONFIGURATION	Contacts	Solder cup Ø	Crimp[2] cup Ø
1031 A/Z 009	9	0.79 for contact Nr.4;9 0.63 for contact Nr.2 0.43 for other contacts	-
1031 A/Z 010	10	0.79	0.60
1031 A/Z 029	12	0.79	-
1031 A/Z 012	12	0.79	0.60
1031 A/Z 015	15	0.43/1.18	-
1031 A/Z 019	19	0.43	0.43

Contact configuration for polarity A (View from B)

009 010 029 012 015 019

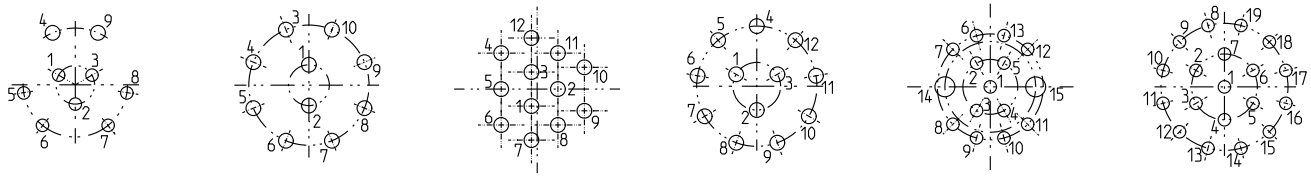

Keying codes (View from F)

Code 1 (-1xx) Code 2 (-2xx) Code 3 (-3xx)

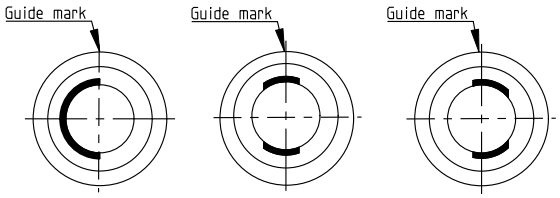

(5)

Contact configuration for polarity Z (View from B)

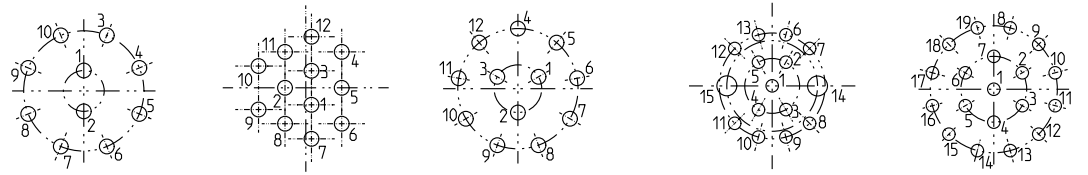

All dimensions in mm	Rev.	Pages
600487	4	1/1

Notes :
1) All tolerances resulting from connector assembly are typically ± 0.3mm
2) For optimum crimping refer to available crimping manual.
3) Max cable diameter below shield.
Part number example : SS 1031 A019-130

4) This torque is a recommended value that may be influenced by the characteristics of the cable.
Tests have to be made to evaluate the exact value.
To secure the back nut, we recommend the use of thread locking adhesive.
5) Please contact us

Information provided herein is believed to be accurate at time of publishing.Fischer Connectors reserves the right to make modifications on products for continuous improvement without prior notice.

Fischer CONNECTORS
www.fischerconnectors.com