
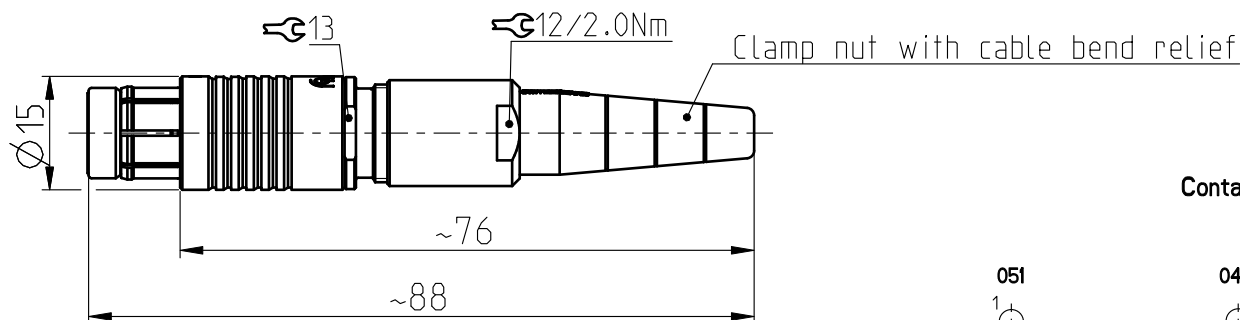
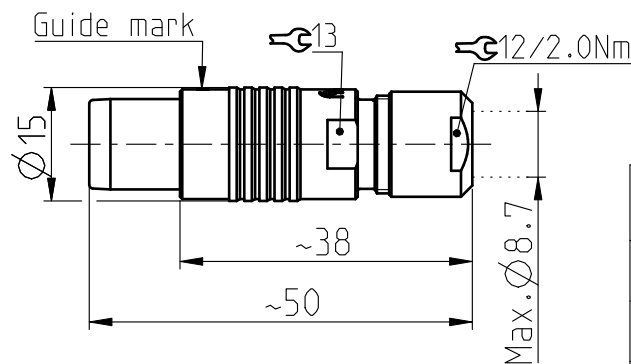


S/SC/SOV 104 Multipole Plugs


All dimensions see note 1)

S/SC

SOV


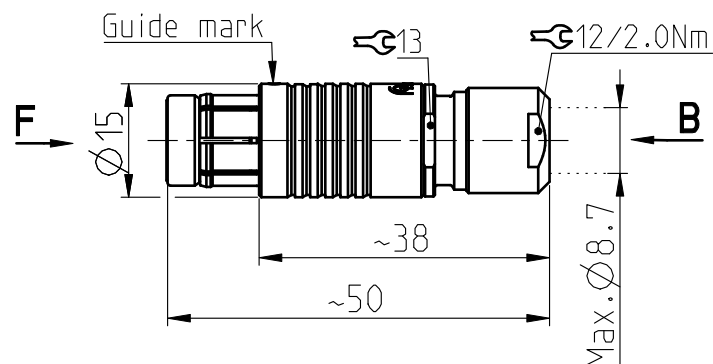


Keying codes (View from F)

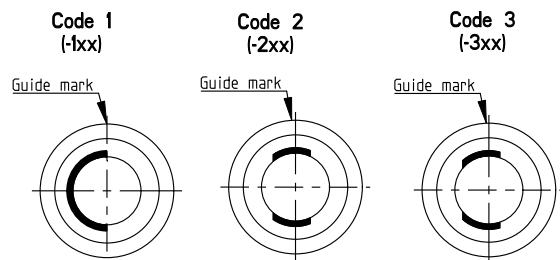


Contact polarity A

Contact polarity Z




CONTACT CONFIGURATION	Contacts	Solder cup Ø		Crimp cup (2) Ø
104 A Z 051	2	1.86		-
104 A Z 040	3	1.86		1.78
104 A Z 037	4	1.18		1.18
104 A Z 087	4	0.79/2.48		-
104 A Z 053	5	1.18		-

Contact configuration for polarity A (View from B)

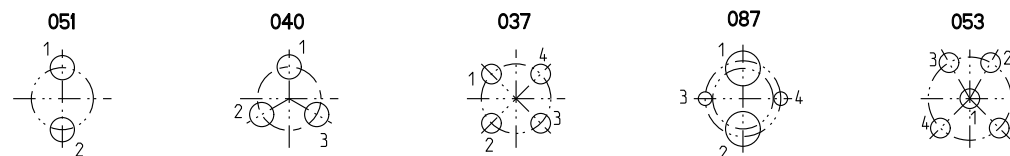

Contact configuration for polarity Z (View from B)

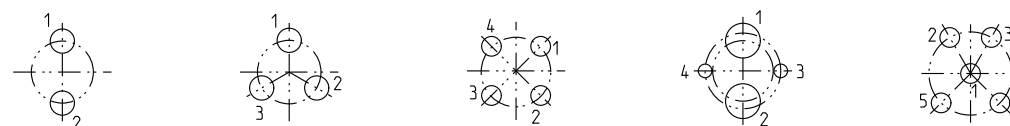

All dimensions in mm

600480

Rev.

2

Pages

1/3

Notes :

1) All tolerances resulting from connector assembly are typically $\pm 0.3\text{mm}$
 2) For optimum crimping refer to available crimping manual.
 Part number example : S 104 A092-130+

fischer

www.fischerconnectors.com




Information provided herein is believed to be accurate at time of publishing. Fischer Connectors reserves the right to make modifications on products for continuous improvement without prior notice.

S/SC/SOV 104 Multipole Plugs


All dimensions see note 1)

S/SC

SOV

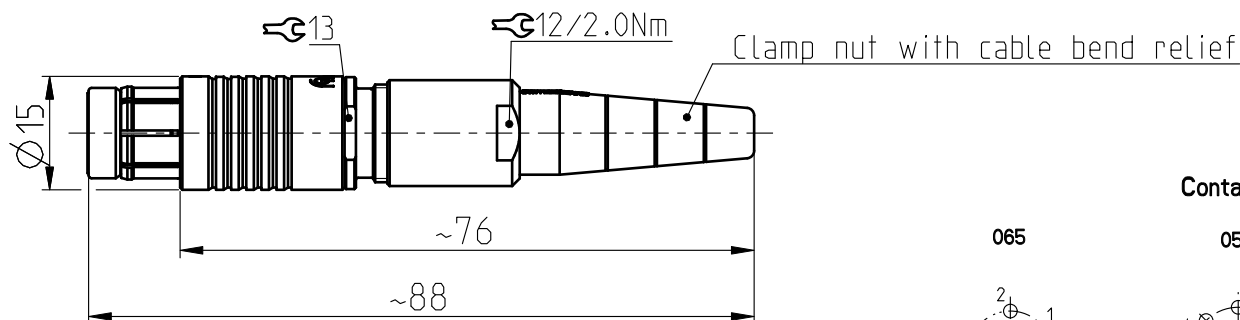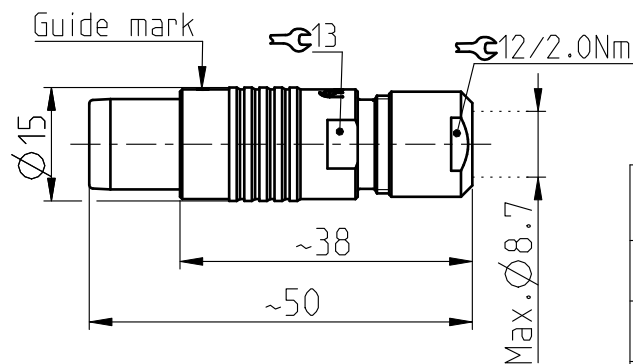
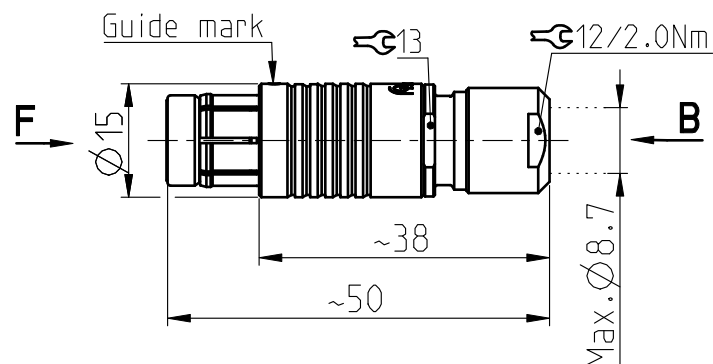


Keying codes (View from F)

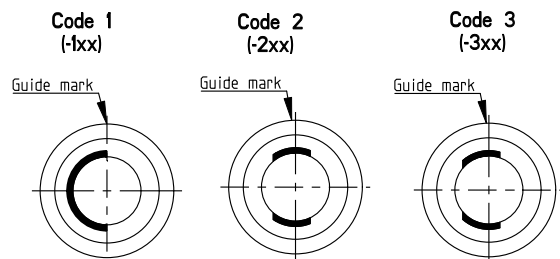


Contact polarity A

Contact polarity Z




CONTACT CONFIGURATION	Contacts	Solder cup Ø	Crimp cup (2) Ø
104 A Z 065	6	0.79	0.80
104 A Z 054	7	0.79	-
104 A Z 066	8	0.79	0.80
104 A Z 055	9	0.79/1.18	-
104 A Z 056	11	0.79	0.80

Contact configuration for polarity A (View from B)

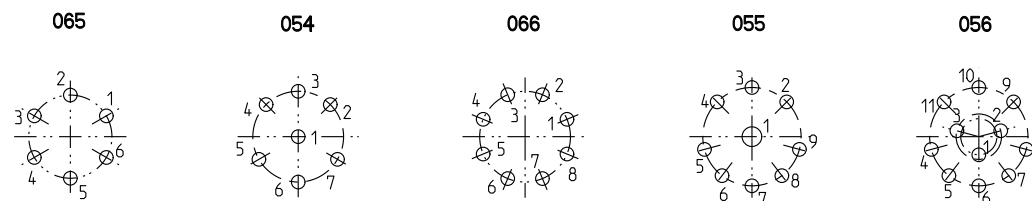

Contact configuration for polarity Z (View from B)

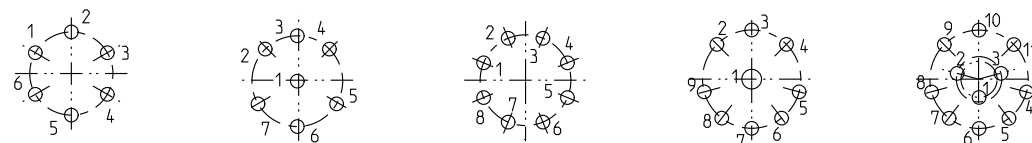

All dimensions in mm

Rev.

Pages

Notes :

1) All tolerances resulting from connector assembly are typically $\pm 0.3\text{mm}$

2) For optimum crimping refer to available crimping manual.

Part number example : S 104 A092-130+

600480

2

2/3

fischer

www.fischerconnectors.com




Information provided herein is believed to be accurate at time of publishing. Fischer Connectors reserves the right to make modifications on products for continuous improvement without prior notice.

S/SC/SOV 104 Multipole Plugs


All dimensions see note 1)

S/SC

SOV

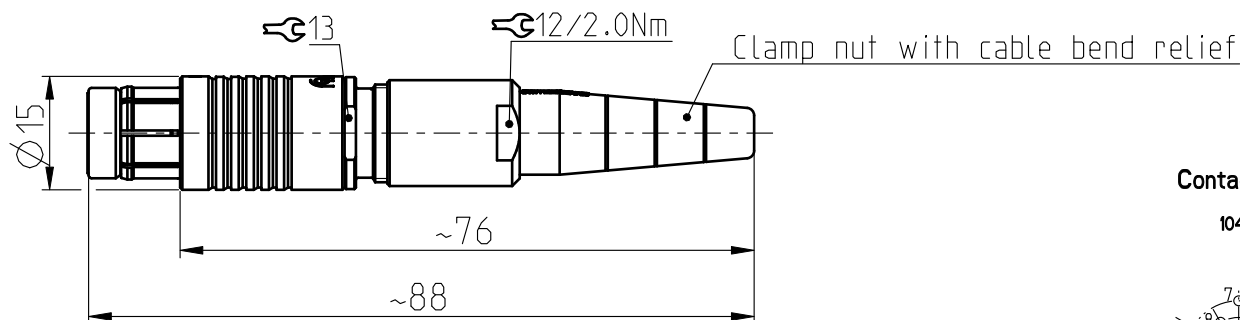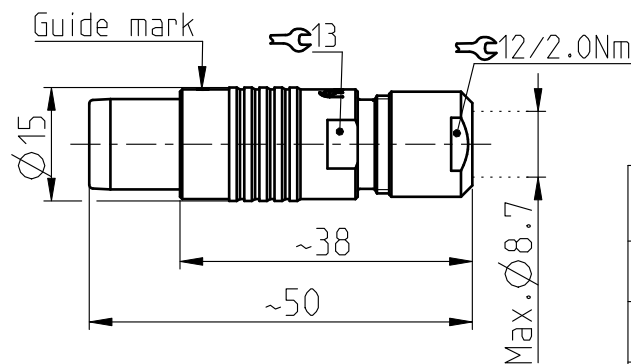
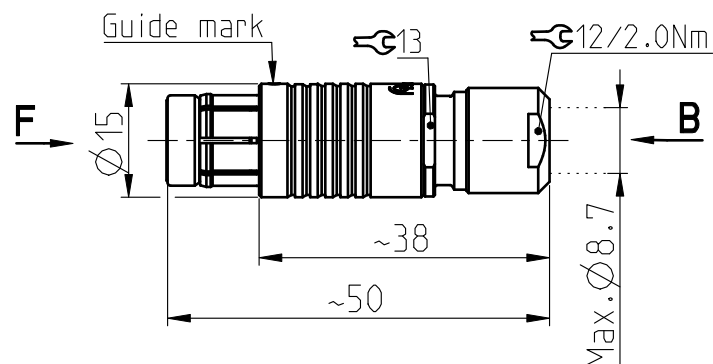


Keying codes (View from F)

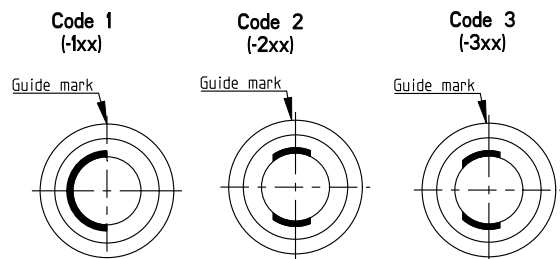

Contact polarity A


Contact polarity Z




CONTACT CONFIGURATION	Contacts	Solder cup Ø	Crimp cup ⁽²⁾ Ø
104 A Z 104	12	0.79/1.18	-
104 A Z 086	16	0.79	0.60
104 A Z 092	19	0.79	0.60
* 104 A 124	27	-	0.43

*Please contact us for additional information

Contact configuration for polarity A (View from B)

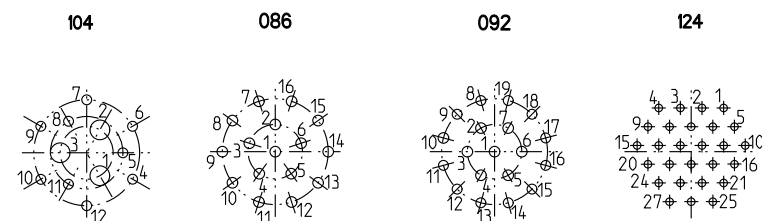

Contact configuration for polarity Z (View from B)

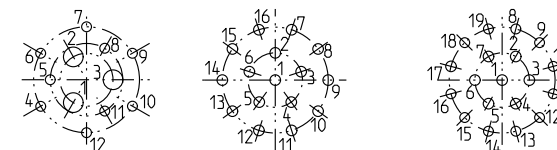

All dimensions in mm

Rev.

Pages

Notes :

1) All tolerances resulting from connector assembly are typically $\pm 0.3\text{mm}$

2) For optimum crimping refer to available crimping manual.

Part number example : S 104 A092-130+

600480

2

3/3

fischer

www.fischerconnectors.com

Information provided herein is believed to be accurate at time of publishing. Fischer Connectors reserves the right to make modifications on products for continuous improvement without prior notice.