

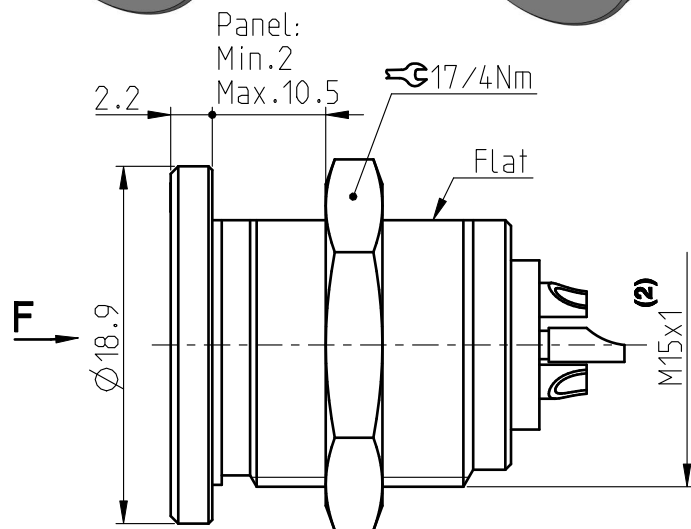




D 104 Multipole Receptacles

Contact polarity A


Contact polarity Z




All dimensions see note 1)



Solder (-x30/-x40)








PCB (-x39/-x49)











Crimp (-x50/-x60)⁽³⁾

CONTACT CONFIGURATION	Contacts	Solder cup Ø	C	PIN Ø	Crimp cup Ø
104 A 051	2	1.86	20.3 19.0	0.50 0.70	-
104 A 040	3	1.86	20.3 19.0	0.50 0.70	1.78
104 A 037	4	1.18	21.3 19.0	0.50	1.18
104 A 087	4	0.79/2.48	21.3 18.5	0.50/1.6 0.63/1.6	-
104 A 053	5	1.18	21.3 19.0	0.50	-

Pin layout / PCB hole pattern for polarity A - View from F ⁽⁴⁾



Keying codes (View from F)



Polarity Z - View from F

All dimensions in mm

Rev.

Pages

Notes :

1) All tolerances resulting from connector assembly are typically $\pm 0.3\text{mm}$

2) If receptacle is screwed directly into threaded hole, oversize thread by $+0.05\text{mm}$

3) For optimum crimping refer to available crimping manual.

4) Recommended PCB hole dimensions may be adjusted to application

5) Please contact us

Part number example : D104 A092-130

600479

3

1/3

fischer
CONNECTORS





www.fischerconnectors.com

Information provided herein is believed to be accurate at time of publishing. Fischer Connectors reserves the right to make modifications on products for continuous improvement without prior notice.


D 104 Multipole Receptacles

Contact polarity A


Contact polarity Z

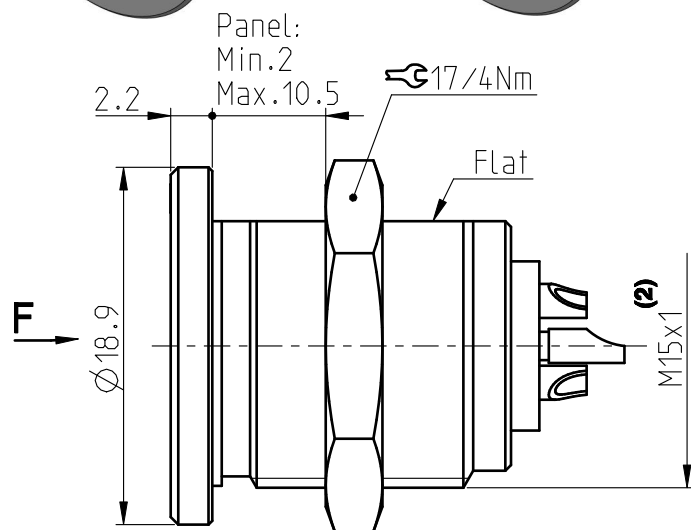


All dimensions see note 1)



Solder (-x30/-x40)








PCB (-x39/-x49)











Crimp (-x50/-x60)⁽³⁾

CONTACT CONFIGURATION			Contacts	Solder cup Ø		C	PIN Ø		Crimp cup Ø
104	A	065	6	0.79		21.3 19.0	0.50 0.63		0.80
104	A	054	7	0.79		21.3 19.0	0.50 0.63		-
104	A	066	8	0.79		21.3 19.0	0.50 0.63		0.80
104	A	055	9	0.79/1.18		21.3 19.0	0.50 0.63		-
104	A	056	11	0.79		21.3 19.0	0.50 0.63		0.80

Pin layout / PCB hole pattern for polarity A - View from F ⁽⁴⁾



Keying codes (View from F)



Polarity Z - View from F

All dimensions in mm

600479

Rev.

3

Pages

2/3

Notes :

- 1) All tolerances resulting from connector assembly are typically $\pm 0.3\text{mm}$
- 2) If receptacle is screwed directly into threaded hole, oversize thread by $+0.05\text{mm}$
- 3) For optimum crimping refer to available crimping manual.

4) Recommended PCB hole dimensions may be adjusted to application

5) Please contact us

Part number example : D104 A092-130

fischer
CONNECTORS





www.fischerconnectors.com

Information provided herein is believed to be accurate at time of publishing. Fischer Connectors reserves the right to make modifications on products for continuous improvement without prior notice.



D 104 Multipole Receptacles

Contact polarity A


Contact polarity Z

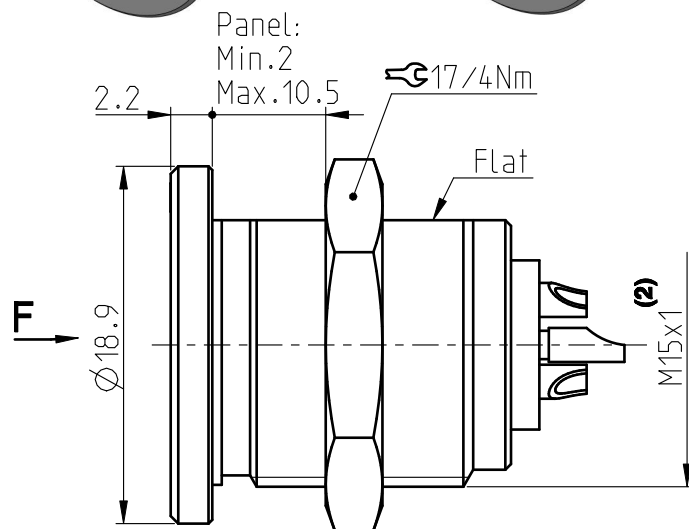


Keying codes (View from F)

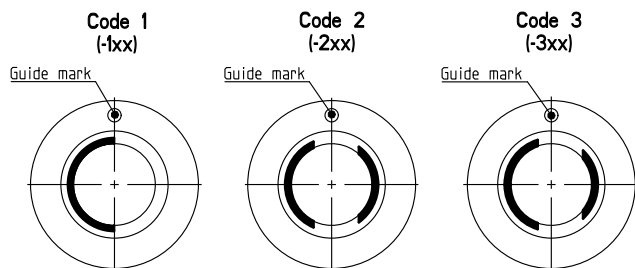

Solder (-x30/-x40)



PCB (-x39/-x49)



Crimp (-x50/-x60)⁽³⁾




CONTACT CONFIGURATION	Contacts	Solder cup ϕ	C	PIN ϕ	Crimp cup ϕ
104 A Z 104	12	0.79/1.18	-	-	-
104 A Z 086	16	0.79	18.3 19.0	0.50	0.60
104 A Z 092	19	0.79	18.3 19.0	0.50	0.60

Pin layout / PCB hole pattern for polarity A - View from F ⁽⁴⁾




104

086

092



Polarity Z - View from F



All dimensions in mm

600479

Rev.

3

Pages

3/3

Notes :

- 1) All tolerances resulting from connector assembly are typically ± 0.3 mm
- 2) If receptacle is screwed directly into threaded hole, oversize thread by $+0.05$ mm
- 3) For optimum crimping refer to available crimping manual.

4) Recommended PCB hole dimensions may be adjusted to application

5) Please contact us

Part number example : D104 A092-130

fischer
CONNECTORS

www.fischerconnectors.com

Information provided herein is believed to be accurate at time of publishing. Fischer Connectors reserves the right to make modifications on products for continuous improvement without prior notice.