DBPE/U 1031 Multipole Receptacles

All dimensions see note **1)**

Contact polarity A



Contact polarity Z





Panel cut-out



Solder (-x39/-x49)



PCB (-x30/-x40)

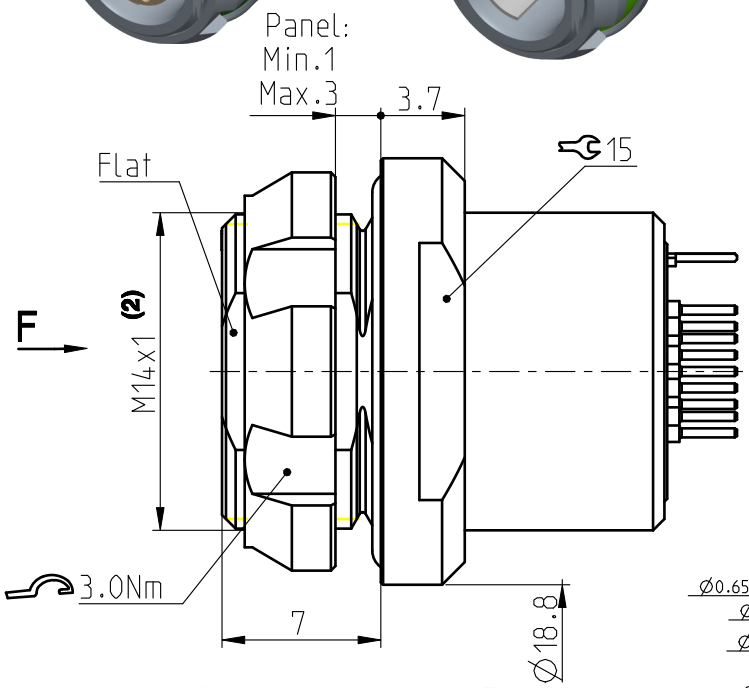

CONTACT CONFIGURATION			Contacts	Solder cup Ø	C	PIN Ø
1031	A	009	9	-	13.2	0.50/0.40
	Z				-	-
1031	A	010	10	0.79	13.2	0.50
	Z				14.0	
1031	A	012	12	0.79	13.2	0.50
	Z				14.0	
1031	A	019	19	0.43	13.2	0.40
	Z				13.0	

Pin layout / PCB hole pattern for polarity A - View from F **(3)**

009

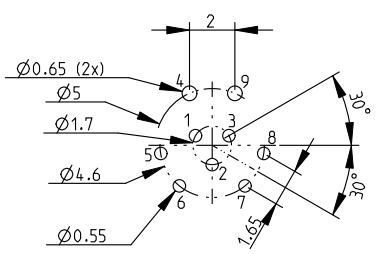

010



012



019



Keying codes (View from F)

Code 1 (-1xx)



Code 2 (-2xx)



Code 3 (-3xx)



(4)

Polarity Z - View from F







All dimensions in mm	Rev.	Pages
600484	3	1/1

Notes :
1) All tolerances resulting from connector assembly are typically ± 0.3mm
2) If receptacle is screwed directly into threaded hole, oversize thread by +0.05mm
3) Recommended PCB hole dimensions may be adjusted to application
4) Please contact us

Fischer CONNECTORS
www.fischerconnectors.com

Information provided herein is believed to be accurate at time of publishing. Fischer Connectors reserves the right to make modifications on products for continuous improvement without prior notice.