DBPLE/U 1031 Multipole Receptacles

Contact polarity A

Contact polarity Z

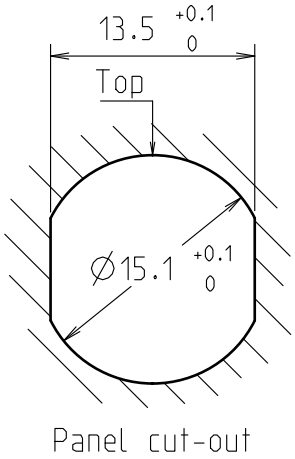

Panel cut-out

All dimensions see note 1)



Solder (-x39/-x49)

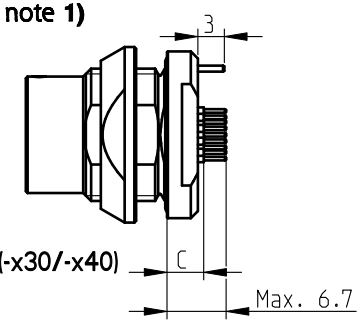

PCB (-x30/-x40)

CONTACT CONFIGURATION	Contacts	Solder cup Ø	C	PIN Ø
1031 A 009 Z	9	-	4.2 -	0.50/0.40 -
1031 A 010 Z	10	0.79	4.2 4.2	0.50
1031 A 012 Z	12	0.79	4.2 4.2	0.50
1031 A 019 Z	19	0.43	4.2 4.2	0.40

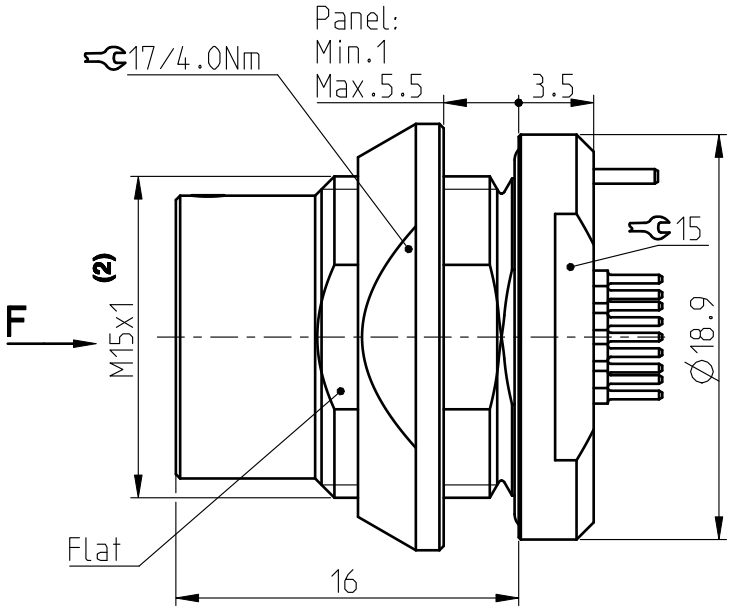

Keying codes (View from F)

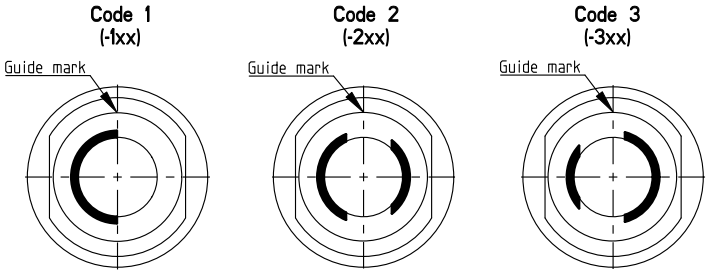

Pin layout / PCB hole pattern for polarity A - View from F (3)

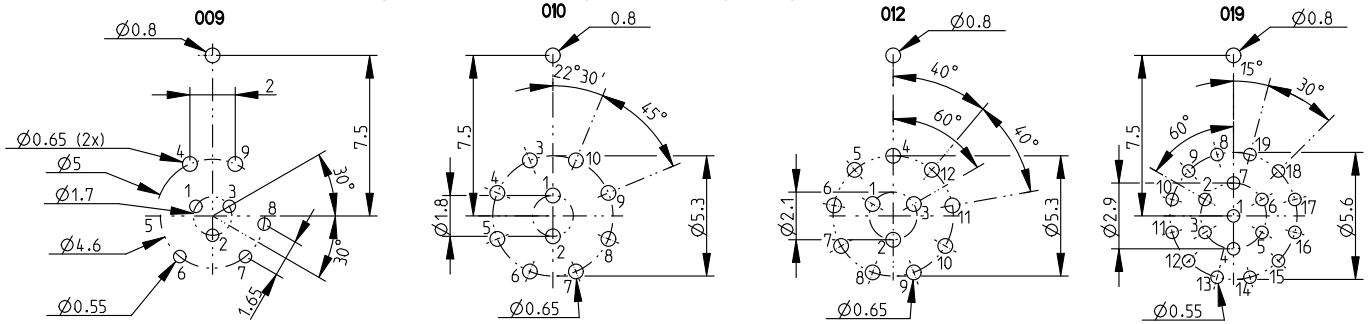

(4)

Polarity Z - View from F

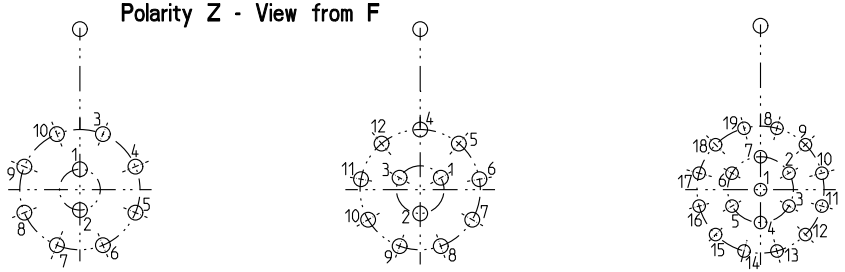

All dimensions in mm	Rev.	Pages
600485	3	1/1

Notes :
1) All tolerances resulting from connector assembly are typically ± 0.3mm
2) If receptacle is screwed directly into threaded hole, oversize thread by +0.05mm
3) Recommended PCB hole dimensions may be adjusted to application
Part number example : DBPLE 1031 A019-130
4) Please contact us

Information provided herein is believed to be accurate at time of publishing.Fischer Connectors reserves the right to make modifications on products for continuous improvement without prior notice.

Fischer CONNECTORS
www.fischerconnectors.com