





DEE/U 103 Multipole Receptacles


All dimensions see note 1)

Contact polarity A


Contact polarity Z



Solder (-x30/-x40)



PCB (-x39/-x49)

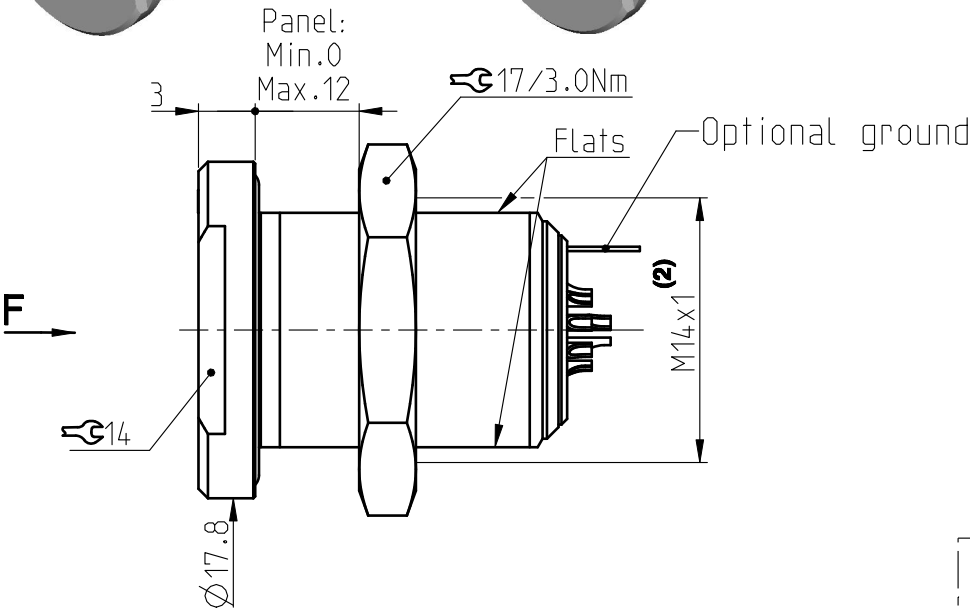

CONTACT CONFIGURATION	Contacts	Solder cup Ø		C	PIN Ø
103 A Z 051	2	1.18		-	-
103 A Z 052	3	1.18		-	-
103 A Z 053	4	0.79		- 17.3	0.63
103 A Z 054	5	0.79		-	-





Pin layout / PCB hole pattern for polarity A - View from F (3)

051


052

053





054



Keying codes (View from F)

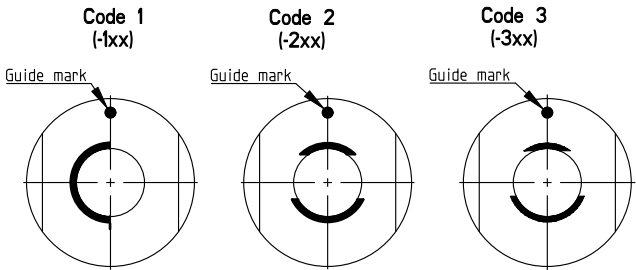

Polarity Z - View from F



All dimensions in mm

600543

Rev.

2d

Pages

1/2

Notes :

- 1) All tolerances resulting from connector assembly are typically $\pm 0.3\text{mm}$
- 2) If receptacle is screwed directly into threaded hole, oversize thread by $+0.05\text{mm}$

3) Recommended PCB hole dimensions may be adjusted to application

4) Please contact us

Part number example : DEE 103 A062-130

fischer
CONNECTORS

www.fischerconnectors.com

All dimensions see note 1)