OVERMOLDING ULTIMATE

UP01 WITH STRAIGHT OVERMOLDING

SIZE	∅X	∅Y	∅Z	L1	L2	L3
07	2.0...3.8	6.4	12.0	48.7	26.5	~39
	>3.8...5.1	7.6				
08	2.0...3.8	8.5	14.5	57.5	30.0	~44
	>3.8...5.9	9.1				
11	2.0...6.5	10.6	18.0	62.8	36.0	~50
	>6.5...9.0	12.1				
	>9.0...10.0					
13	2.0...9.7	13.6	21.7	77.8	42.0	~61
15	2.0...10.5	15.6	23.7	77.8	42.0	~61

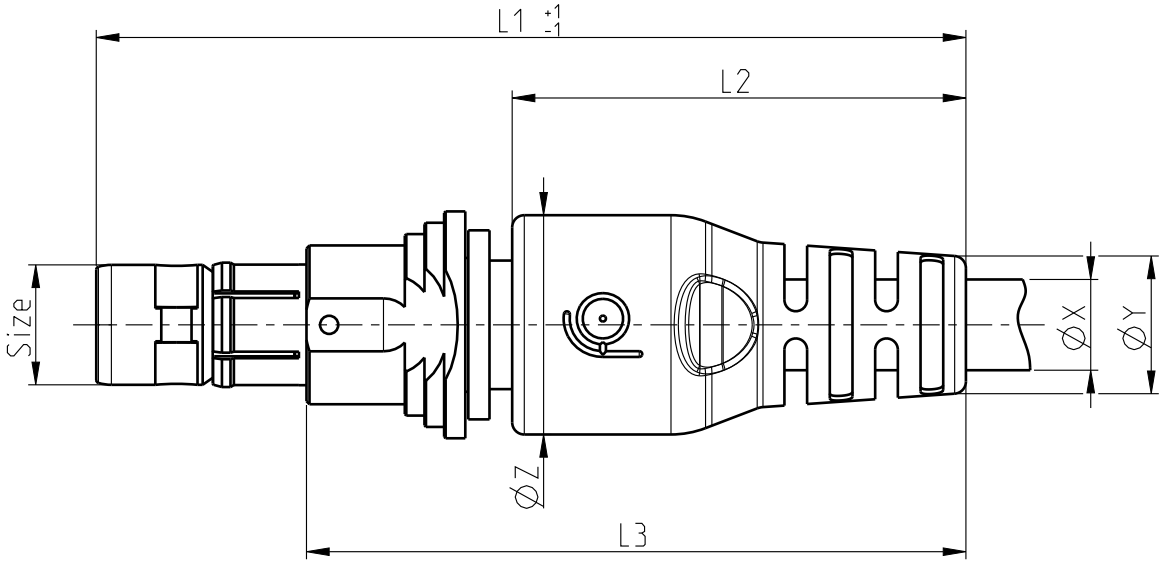

All dimensions in mm	Rev.	Pages
600545	4	1/4

Notes :
1) General tolerances: ± 0.5mm

Information provided herein is believed to be accurate at time of publishing.Fischer Connectors reserves the right to make modifications on products for continuous improvement without prior notice.

OVERMOLDING ULTIMATE

UP01 WITH RIGHT ANGLE OVERMOLDING

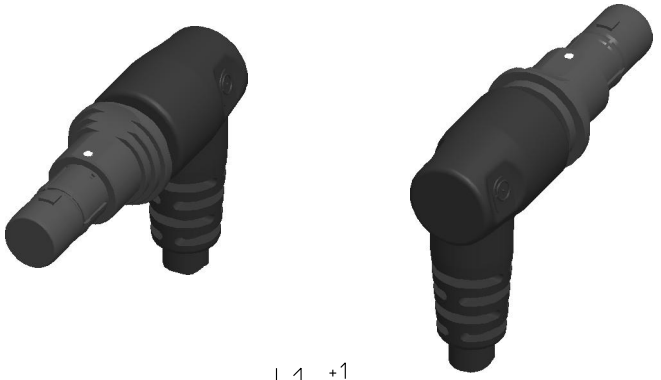

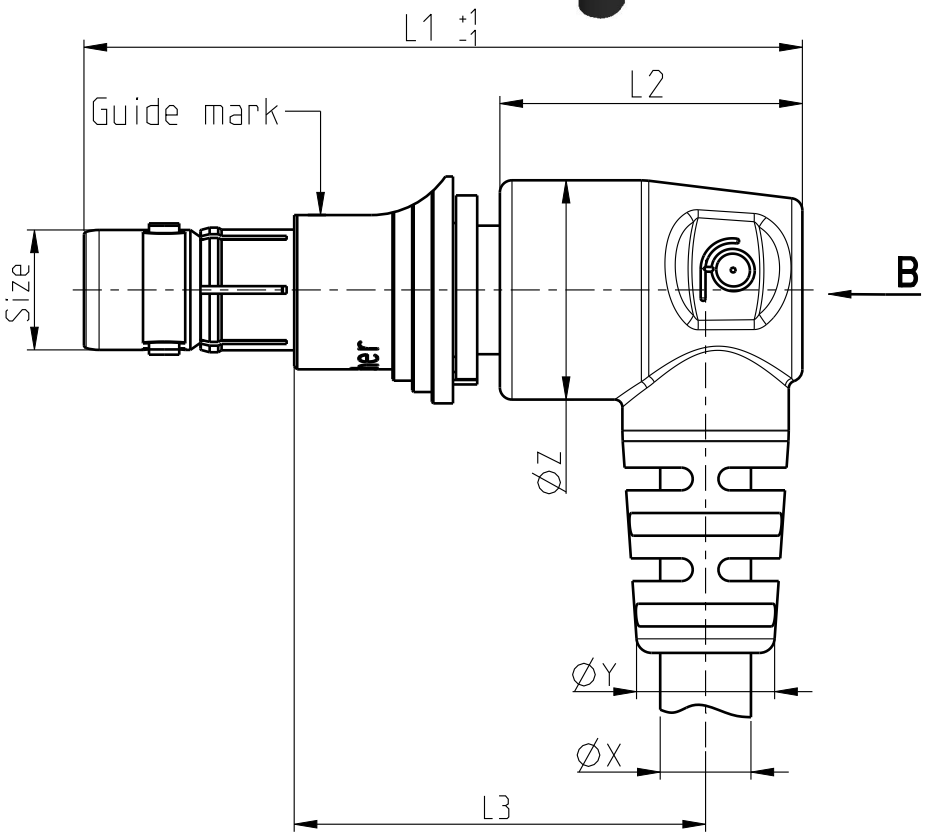

SIZE	ØX	ØY	ØZ	L1	L2	L3	L4	L5
07	2.0...3.8	6.4	12.0	36.2	14.0	~21	20.0	26.0
	>3.8...5.1	7.6						
08	2.0...3.8	8.5	14.5	47.5	20.0	~27	24.0	31.3
	>3.8...5.9	9.1						
11	2.0...6.0	10.6	18.0	51.8	25.0	~31	30.0	39.0
	>6.0...10.0	12.1						
13	2.0...9.7	13.6	21.7	65.8	30.0	~40	30.0	40.9

Cable Orientation(2)

(View from B)

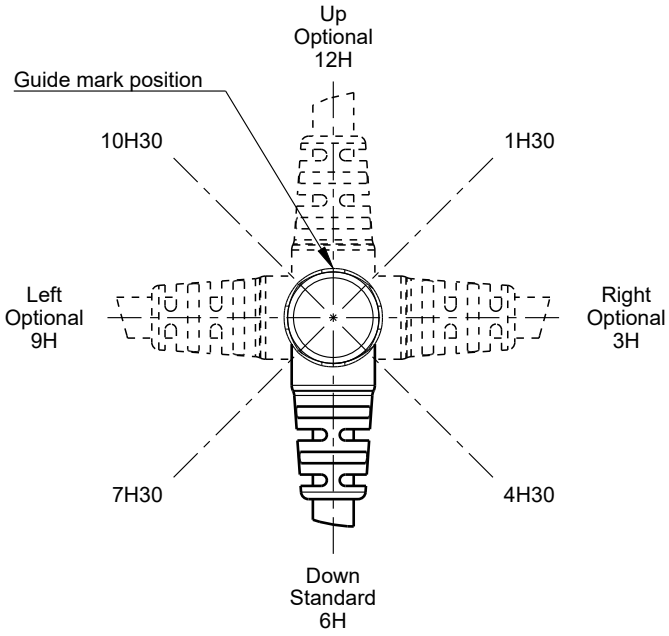

All dimensions in mm	Rev.	Pages
600545	4	2/4

Notes :
1) General tolerances: ± 0.5mm
2) Can be positionned in 45° increments

Information provided herein is believed to be accurate at time of publishing.Fischer Connectors reserves the right to make modifications on products for continuous improvement without prior notice.

OVERMOLDING ULTIMATE

UP02 WITH STRAIGHT OVERMOLDING

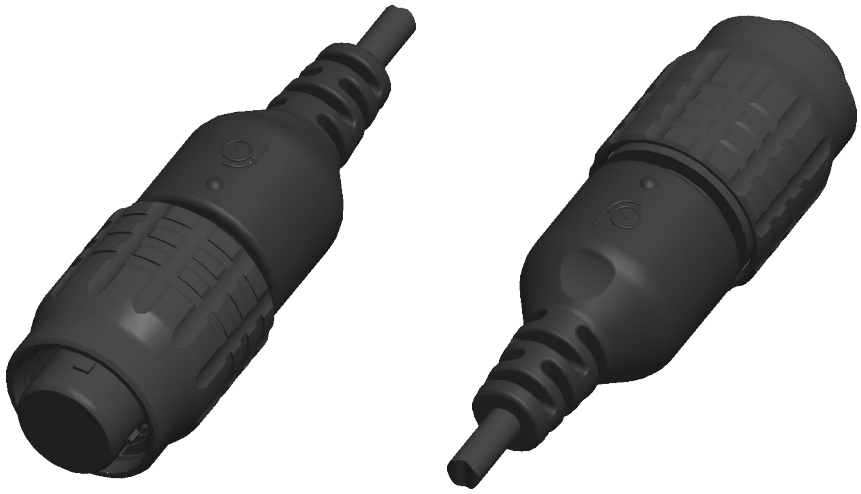

SIZE	∅X	∅Y	∅Z	L1	L2
15	2.0...5.0	10.6	23.8	78.0	42.0

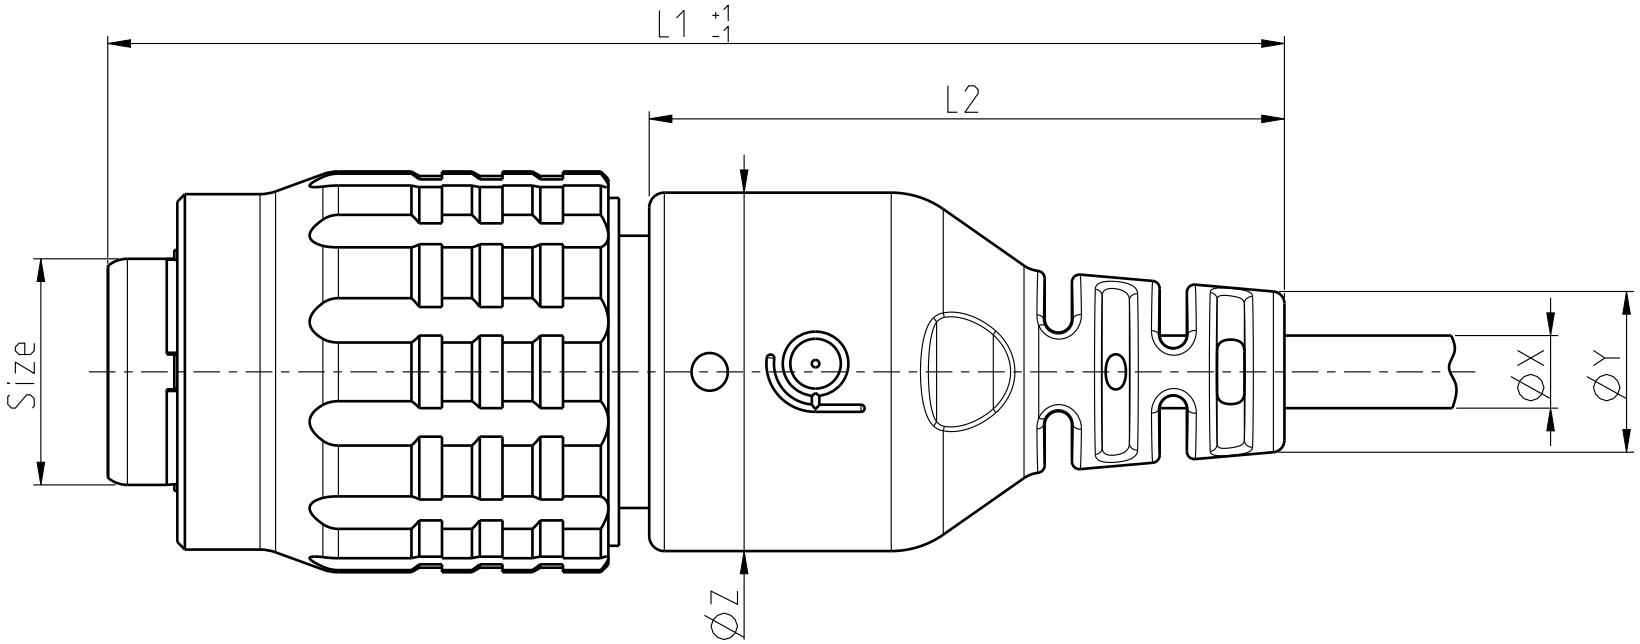

All dimensions in mm	Rev.	Pages
600545	4	3/4

Notes :
1) General tolerances: ± 0.5mm

Information provided herein is believed to be accurate at time of publishing.Fischer Connectors reserves the right to make modifications on products for continuous improvement without prior notice.

OVERMOLDING ULTIMATE

UR50 WITH STRAIGHT OVERMOLDING

SIZE	∅X	∅Y	∅Z	L1	L2
07	2.0...3.8	6.4	12.0	47.7	26.5
	>3.8...5.1	7.6			
08	2.0...3.8	8.5	14.5	57.2	30.0
	>3.8...5.9	9.1			
11	2.0...6.5	10.6	18.0	62.5	36.0
	>6.5...9.0	12.1			
	>9.0...10.0				
13	2.0...9.7	13.6	21.7	78.3	42.0

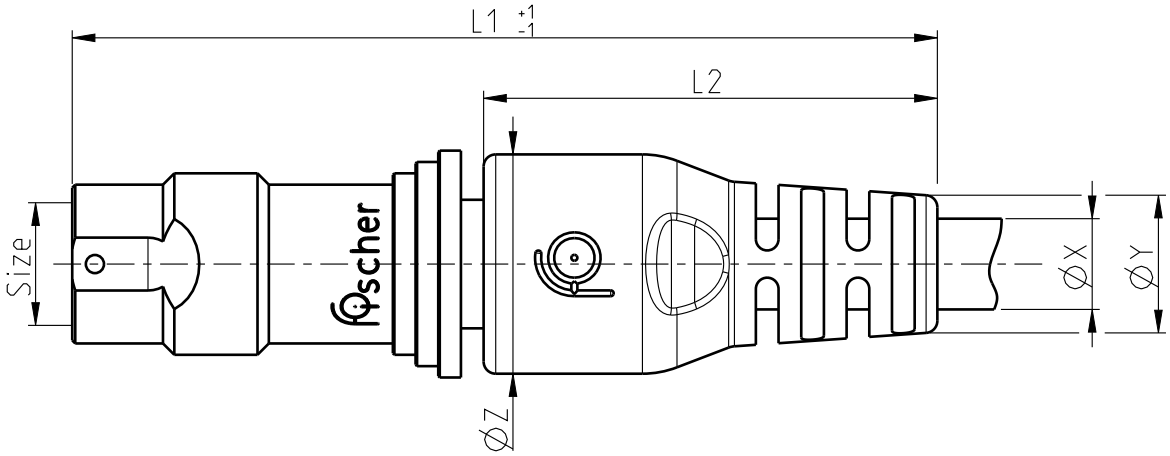

All dimensions in mm	Rev.	Pages	Notes :
600545	4	4/4	1) General tolerances: ± 0.5mm

Information provided herein is believed to be accurate at time of publishing.Fischer Connectors reserves the right to make modifications on products for continuous improvement without prior notice.