

CABLE MOUNTED RECEPTACLE


GENERAL INFORMATIONS

Part number	122128
Designation	K 1031 Z010-130+
Product line	Core Series Brass
Series size	1031
Connector type	Receptacle
Body style design	Straight
Housing material	Brass
Housing color	Grey
Contact termination	Solder
Contact gender	Male
Contact configuration	Multipole low voltage
Locking system	Plug-related
Mounting type	Cable Mounted
Cable diameter (min - max) [mm]	2.2 - 7.2
Panel cut-out diameter [mm]	-
Data protocol compliance	-



Picture for illustration purpose only.
Contact configuration may vary- refer to pin layout.

DIMENSIONS

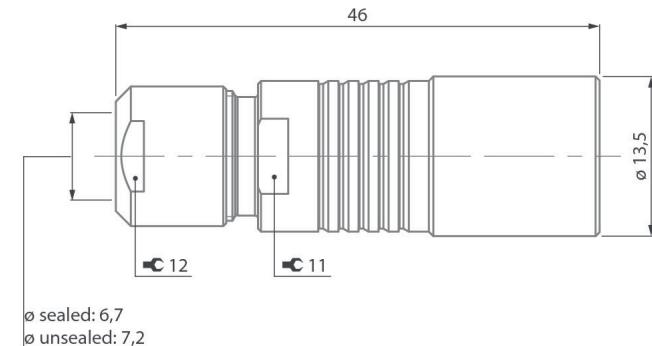

KEYING CODE



PIN LAYOUT



All dimensions and images shown are in millimeters and are for reference only.

ELECTRICAL & CONTACT CONFIGURATION

Number of contacts	Contact type	Insulator material	Contact Ø [mm]	Pin Ø [mm]	Ground pin Ø [mm]	Wire size min [AWG]	Wire size max [AWG]	Test voltage AC r.m.s [kV] in mated position		Test voltage DC [kV] in mated position		Current per contact [A]
								Contact to body	Contact to contact	Contact to body	Contact to contact	
10	Multipole low voltage	PEEK	0.7	-	-	-	21	1.4	1.5	2	2.2	4.5


ENVIRONMENTAL & MECHANICAL DATA

Characteristic	Value	Standard
Corrosion resistance	Salt mist, 1000 hours ; 5% salt solution, 35°C	IEC 60068-2-11 Test Ka // MIL-STD-202 Method 101 Condition A // EIA-364-26
Endurance	10'000	IEC 60512-2-1, Test 2a // IEC 60512-2-2, Test 2b
Vibration resistance	10 to 2000 Hz, 1,5 mm or 15 g, 12 sweep cycles per axis, 20 minutes per 10-2000-10 Hz sweep cycle, no discontinuity > 1us	MIL-STD-202 Method 204 Condition B
Shock resistance	On request	On request

For this connector, you need to select from the following clamp sets

S SHIELDED CLAMP SET

Shielded cable clamp with sleeve, washer and clamp.

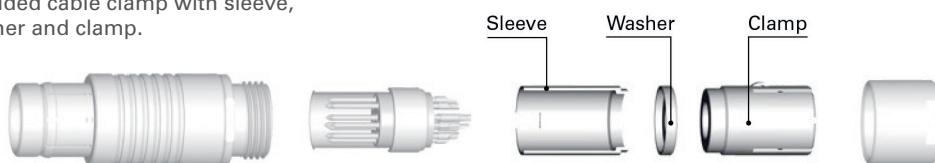

Characteristic	Value	Standard
Sealing performance	IP50	IEC 60529
Operation temperature	From -65 °C to 250 °C	IEC 60512-6-11 i+j // IEC 60068-2-14-Nb

U UNSHIELDED CLAMP SET


Unshielded, one-piece cable clamp.



Characteristic	Value	Standard
Sealing performance	IP50	IEC 60529
Operation temperature	From -65 °C to 250 °C	IEC 60512-6-11 i+j // IEC 60068-2-14-Nb

E ENVIRONMENTAL CLAMP SET

Environmentally sealed clamp for use with shielded or unshielded cables.

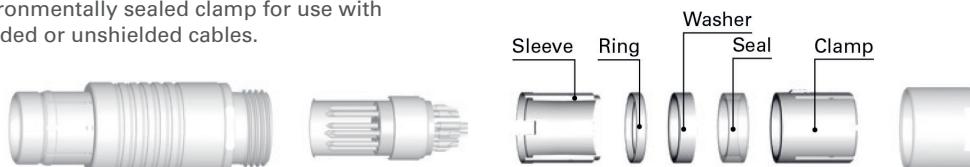

Characteristic	Value	Standard
Sealing performance	IP68 / IP69K	IEC 60529
Operation temperature	From -65 °C to 130 °C	IEC 60512-6-11 i+j // IEC 60068-2-14-Nb