


GENERAL INFORMATION

DIMENSIONS



KEYING CODE

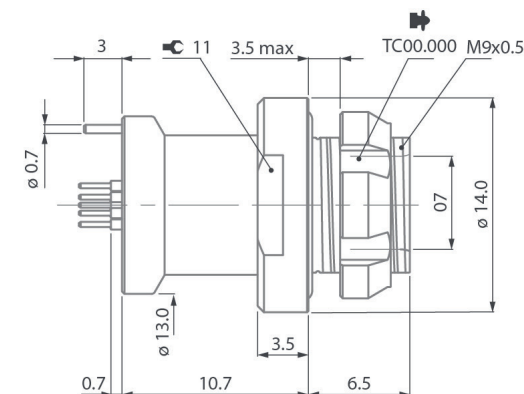

PIN LAYOUT



ELECTRICAL & CONTACT CONFIGURATION

1 / 2

ENVIRONMENTAL & MECHANICAL DATA

Characteristic	Value	Standard
Sealing performance	IP68/IP69 unmated	IEC 60529 (-2m/24h)
Operation temperature	From -55 °C to 135 °C	IEC 60068-2-14-Nb
Corrosion resistance	Salt mist, 1000 hours ; 5% salt solution, 35°C	IEC 60068-2-11 Test Ka // MIL-STD-202 Method 101 Condition A // EIA-364-26
Endurance	10'000	IEC 60512-9-1 // EIA-364-09
Vibration resistance	10 to 2000 Hz, 1,5 mm or 15 g, 12 sweep cycles per axis, 20 minutes per 10-2000-10 Hz sweep cycle, no discontinuity > 1us	MIL-STD-202 Method 204 Condition B
Shock resistance	300g amplitude, half sine pulse of 3 ms, no discontinuity > 1 µs	MIL-STD-202 Method 213 // EIA-364-27